

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 September 2005 (29.09.2005)

PCT

(10) International Publication Number
WO 2005/090148 A1

(51) International Patent Classification⁷:
3/08, 3/12, A47B 43/00, A47F 5/10

B62H 3/06,

(74) Agent: WRAY & ASSOCIATES; Level 4, The Quadrant,
1 William Street, Perth, Western Australia 6000 (AU).

(21) International Application Number:
PCT/AU2005/000405

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NL, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.

(22) International Filing Date: 21 March 2005 (21.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004901463 19 March 2004 (19.03.2004) AU


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

(71) Applicants and

(72) Inventors: STEADMAN, David, Lee [AU/AU]; 1 Collier
Street, Applecross, Western Australia 6153 (AU). COLLI-
COTT, Ronald, James [AU/AU]; 3 Fitzroy Close, Water-
side, Mandurah, Western Australia 6210 (AU).

[Continued on next page]

(54) Title: RACK

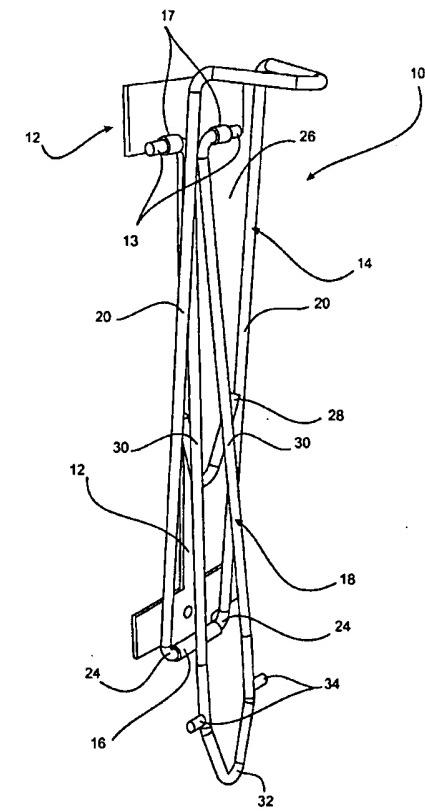

(57) Abstract: A rack (10) intended in use to be supported from an up-standing support, the rack comprising a base (12) adapted to be fixed to the support, a support member (14) connected to the base to be pivotable about a first axis which is generally level, to be moveable between a first position, at which it is adjacent to the support and a second position at which it extends laterally from the support, the support member being adapted to receive and support an item when in its second position.

WO 2005/090148 A1

WO 2005/090148 A1



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*